


Product features		Vinyl on HDF baseboard Friends with cork impact sound insulation	
Dimensions		1209 x 173 x 8,6 mm	1209 x 221 x 8,6 mm
Wear layer		0,3 mm	
Groove		V-groove 4-sided	
Profile		ClickItEasy	
Gloss level		mat	
Packing	pack:	10 pieces per pack (ca. 2,092 m ²)	10 pieces per pack (ca. 2,672 m ²)
	pallet:	36 packs per pallet (ca. 75,31 m ²)	36 packs per pallet (ca. 94,19 m ²)
Weight	pack:	16 kg	23 kg
	pallet:	578 kg	834 kg

Tolerances: requirements DIN EN 16511

Flatness, f [%] [concave/convex]	[≤ 0,50/ ≤ 1,0] (length) [≤ 0,15/ ≤ 0,20] (width)	Gap openings, o [mm]	≤ 0,15 (average) ≤ 0,20 (single value)
Height differences, h [mm]	≤ 0,10 (average) ≤ 0,15 (single value)	Thickness, t [mm]	≤ 0,50
Squareness, q [mm]	≤ 0,20	Length, l [mm]	l ≤ 1500mm ≤ 0,5; l > 1500mm ≤ 0,3
Straightness, s [mm/m]	≤ 0,30	Width, w [mm]	≤ 0,10, Max.-Min. ≤ 0,2
Dimensional change due to temperature variations [%]	≤ 0,25	Minimum content of bonding agent in wear layer	Type I (80 %)

Product construction:

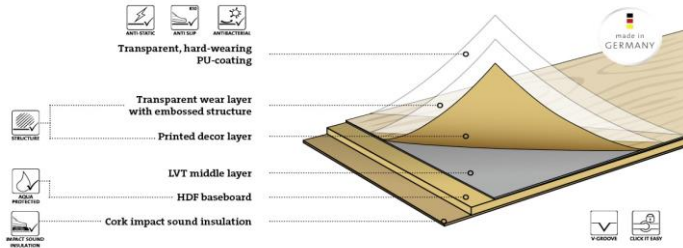

Warranty (according to separate terms of warranty)	domestic usage 15 years commercial usage 5 years	comment	
--	---	---------	--



Classification DIN EN 16511

	Usage Class	Test standard	Valuation
	heavy use in private living rooms	EN ISO 10874	23
	Moderate use in commercial sector	EN ISO 10874	31
	Reaction to fire	DIN EN 13501-1	B (fl) s1 flame retardant
	Formaldehyde emission	EN 717-1:2005	fulfils requirements
	Light fastness	ISO 105-B02	m > 6 Grade
	Slide resistance	EN 13893	DS
	Slip resistance	DIN 51130	R10
	Electrostatics	EN 1815	≤ 2 kV (antistatic)
	Wear resistance	EN 13329 (enclosure E)	fulfils requirements
	Residual indentation	EN ISO 24343-1	≤ 0,1 mm
	Resistance to chair castors	EN ISO 4918	No visible impact if soft chair castors are used (type W)
	Thermal resistance	EN 12664	0,07m ² k/W
	Warm water underfloor heating	EN 1264-2	suitable ≤ 27 °C
	Sound absorption	EN ISO 10140-3	14 dB
	Swelling in thickness	ISO 24336	≤ 18 %
	Chemicals test	EN ISO 26987	passed*

Changed by:	ter Hürne	Date:	Nov. 21	Update:	
-------------	-----------	-------	---------	---------	--

*Resistant to brief exposure to customary and common oils, acids, greases and alkalins. Staining substances may cause permanent, non-removable discoloration.