
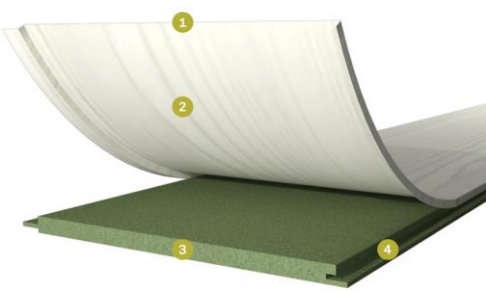


Produkteigenschaften		UniqueDesign Panels		
		Decor Edition		Linear Edition
Format		1300 x 250 x 12 mm	2600 x 250 x 12 mm	2600 x 148 x 12
Deckmaß		1295 x 237,2 x 12 mm	2595 x 237,2 x 12 mm	2600 x 135 x 12 mm
Bevel		invisible joint		-
Profile		Tongue and groove with clip fastening		
Type of installation		MDF (720 +/- 30 kg/m ³)		
Gloss level		matt / seidenmatt / glänzend		matt / seidenmatt
Packaging	Pack:	4 pieces per pack (approx. 1,3 m ²)	4 pieces per pack (approx. 2,6 m ²)	4 pieces per pack (approx. 1,539 m ²)
	Pallet:	30 packs per pallet (approx. 39 m ²)	30 packs per pallet (approx. 78 m ²)	50 packs per pallet (approx. 76,96 m ²)
Weight	Pack:	11,1 kg	22,15 kg	10,88 kg
	Pallet:	358 kg	714 kg	594 kg


Product construction: 1 Textured coating 2 Decor paper 3 Swell-reduced MDF baseboard (E1 quality) 4 Tongue and groove profile for clip fixing				
--	--	--	---	--

Tolerances:			
Height difference, h [mm]	≤ 0,4 mm	Gap opening, o [mm]	≤ 0,3 mm
Squareness, q [mm]	0,2%; max. 0,3 mm	Thickness, t [mm]	± 0,5 mm
Straightness, s [mm/m]	1 mm	Length, l [mm]	± 2 mm
Dimensional changes due to changes in relative humidity [%]	≤ 0,25	Width, w [mm]	± 1 mm

Certificates

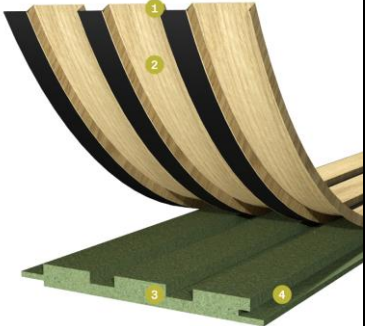

Usage / surface properties (test standard)

		Test standard	Valuation
	Reaction to fire	EN 13501	D-s2, d0
	Formaldehyde (E1 = 0,1 ppm)	EN 717-1	E1
	PCP-content	EN13986-5, 18 + A1	≤ 5
	Suitability of recessed lights		Heat-resistant up to 110 °C. Suitable for mounting all tested recessed lights with the MM mark.
	Suitable for bathromms		Yes, with adequate ventilation and no direct contact with water.
	Fixing		Installation Clip No. 2
	Disposal		Private disposal with regular household waste / bulk waste disposal